

## Total protection, perfect shrinking

Quick and easy shrinkwrap thanks to the **TURBOPACK®** column



**Independent and mobile**  
the TURBOPACK® moves **to the pallets**, thus avoiding the handling of unsteady loads.


**Flexible**  
No limitation in length or width of the load. Heating height adjustable from 1.20 / 47" up 2.40 m / 95" (2.20 m / 86" with optional visor).

Delivered complete with the **pressure relief valve** and **hoses** for connection to the gas cylinders. The adjustable **visor** on option allows better shrink of the top and sticking of the gussets.

The TURBOPACK® is a shrink column mounted on a trolley pushed by the operator ■ **easy** to operate, very **little maintenance** needed ■ ignition by **piezo** ■ a **safety** device automatically stops the combustion when the trigger is released

**Quick and economical** ■ **60 seconds** only for one euro pallet, whatever the height ■ **60 pallets** shrink-wrapped with one standard propane gas cylinder

Power developed	190 kW
Consumption at 100 %	12 kg/h
Operating Pressure	adjustable from 2 to 3 bar
Gas type	Propane cylinders 10-19 kg
Weight	110 kg
Max. heating height	240 cm (without visor)
Passage around the pallet	140 cm

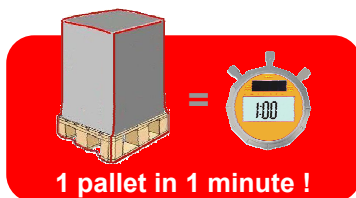

Distributed by

